

# SABRE™ I Remote

## BGAN for SCADA



The SABRE™ I Remote is a dual purpose BGAN terminal. It can be a user terminal with a MMI interface or used for SCADA applications. It has an enhanced firmware which can provide reliable continuous 24/7 operations and connectivity with the BGAN network.

The SABRE™ Shield provides protection to the SABRE™ I Remote so that it can be installed outdoors for all weather conditions.

### FEATURES

#### Standard BGAN features

- Simultaneous voice SMS & data communications
- Data rate of up to 384 kbps
- Built-in Ethernet and Analog Phone interfaces
- Supports voice, SMS, email, messaging, VPN, FTP, VoIP, FoIP and video media streaming
- Designed for non-technical user
  - Swiveled antenna mount facilitates easy pointing
  - Simple to use menu interface
  - Light weight, robust and reliable
- IP watchdog

#### Additional SCADA features

- Enhanced firmware for reliable continuous BGAN network connectivity
- Remote PDP activation/deactivation via SMS
- Reboot terminal via SMS
- 24/7 Always-on capability

#### SABRE™ SHIELD features

- Easy installation with mounting bracket
- Single multi function cable
- Robust industrial grade connector
- IP 66



## BGAN for SCADA

The SABRE™ I Remote brings BGAN technology to the field of remote unmanned SCADA applications. It is user controllable via AT commands for customized satellite applications.

## Remote SMS Control


The terminal can be controlled remotely via SMS to activate/deactivate IP data connection or to perform SCADA operations. In instances where users need to reboot the terminal, the user can trigger the reboot by sending a SMS.

## Autonomous Machine-to-Machine Operations

This terminal can be used for SCADA applications without any external device. It is designed for long term deployment in remote unmanned location and ease for installation.

## All Weather

When used with SABRE™ SHIELD, an IP66 weather-proof box, the SABRE™ I Remote can be installed outdoor in all weather SCADA applications.

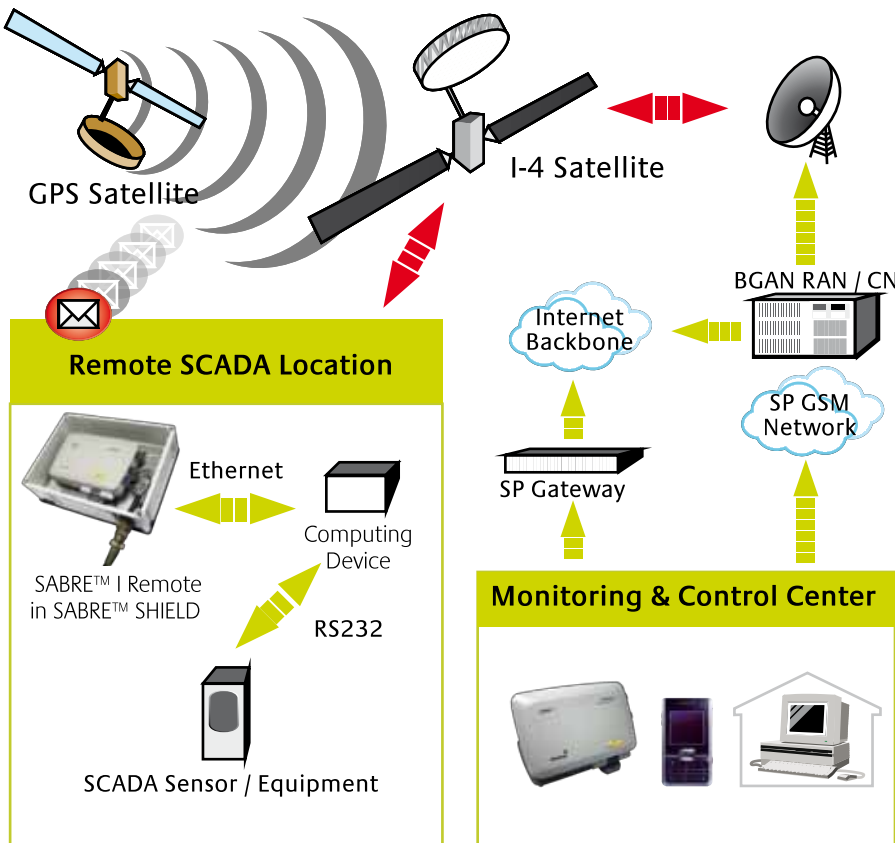

## Technical Specifications

### Frequency Band

Receive: 1525MHz - 1559MHz  
Transmit: 1626.5MHz - 1660.5MHz

### Antenna

Type: Built-in patch antenna

### Bearer Data Rate

Receive: 384 kbps (Max)  
Transmit: 240 kbps (Max)

### GPS Air Interface

Integrated GPS receiver and antenna

### Streaming IP

32 kbps, 64 kbps

### Ethernet / LAN

1 x RJ45 Ethernet Port

### Phone

1 x RJ11 Analog Phone Port

### Supports 3GPP AT commands

### Operating System Support

Microsoft Windows, WinCE, Mac OS, Linux

### Environmental

Operating Temp: -40°C to +70°C (The LCD display will not be functional under -20°C/-4°F)  
Charging Temp: 0°C to +45°C  
+32°F to +113°F

Operating Humidity: 95%

(non-condensing at 40°C or +104°F)

Storage Temp: -40°C to +80°C

Storage Humidity: 5% to 95% (RH)

Water & Dust: IP54

### Battery

Type: Lithium Ion

Transmit Time: 1 hour continuous transmission

Receive Time: 3 hour continuous receive

without transmit requirement

Standby Time: 12 hours

### Electrical

DC Input: 15 VDC (power adapter)

12 ~ 28 VDC (car charger)

### Power Consumption

Idle: 4 W

Receive: 6 W

Transmit: 22 W

### Power Adapter

Input: 100 ~ 240 VAC, 47 ~ 63 Hz

Output: 15 VDC

### Mechanical

Weight: 1.65 Kg / 3.63 lbs

Dimensions: 259 x 195 x 58 mm

### Specifications for SABRE™ SHIELD with 10m cable

#### Environment

Operating Temp: -40°C to +70°C (Shield)

-40°C to +80°C (Cable)

Storage Temp: -40°C to +80°C

Operating humidity: 20% and 90%

Water & Dust: IP66

#### Mechanical

Dimensions: 380 x 280 x 130 mm with High Impact strength

(Shield)

#### Certificate of Compliance

CE

IP66

RoHS

UV Resistance

#### Export Control Classification Number

5A002a.1

© 2011 Addvalue Communications Pte Ltd. All rights reserved. Addvalue Communications may have pending patent applications, trademarks or registered trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give you any license to these intellectual properties.

This material may contain unintended errors or omissions and is subject to change without notice. It is provided as is and without any express or implied warranties, including merchantability, fitness for a particular purpose and non-infringement. Addvalue shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

Addvalue, the Addvalue Enabled logo, Wideye, the Wideye logo and Sabre are either trademarks or registered trademarks of Addvalue Communications Pte Ltd in Singapore and/or other countries.

Inmarsat, the Inmarsat logo registered trademarks of Inmarsat Global Limited in the United Kingdom and/or other countries, and are used by Addvalue Communications Pte Ltd under license.