



User Guide Version 1.0


SB1/AH100 Corded Analog Handset

www.wideye.com.sg

Setting up the SB1/AH100 Corded Analog Handset for use

- Connect the end of the Corded Analog Handset to the SABRE™ | RJ11 connector (See Figure 2).
- 2. You will hear a click when the RJ11 jack is in place.
- 3. Press the Off Hook Button , and the Off Hook LED will light up and listen for the dial tone.
- 4. Once a dial tone is heard, your telephone is operational.
- 5. Press the On Hook Button 🔷 to on hook the phone.

Figure 2

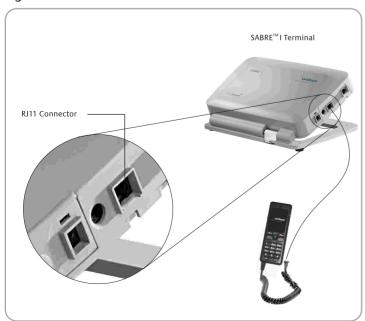

This Passive Device is intended to use only with Wideye SABRE™I as an optional accessory and tested together with SABRE™I to comply all essential requirements and relevant standards.

Caution Note: "This device should not be connected to any other PSTN terminal including WALL PLUG(RJ11), which will damage the phone entire functionality"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Hereby, Addvalue Communications Pte Ltd declares that this SB1/AH100 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Figure 1



Functions of your SB1/AH100 Corded Analog Handset

The functions of the buttons of the Corded Analog Handset are illustrated in Figure 1 above.

Making a Phone Call

After you have setup SABRE m I Terminal for use, you can make phone calls directly or via phonebook selection on SABRE m I LCD.

- 1. Making phone call directly:
- I. With the SABRE™ I Terminal in the ready state, using the Corded Analog Handset, Press the to listen to the dial tone before dialing and dial the calling party number in the following format: <00> <Country Code> <Telephone Number> <#>.
- 2. Making phone calls via Phonebook -
- I. Use the Up/Down buttons on the SABRE™ I LCD to select ☐☐ Icon.
- I. Scroll to the calling party's name and Press ENTER.
- III. Press the button on the Corded Analog Handset to listen to the dial tone.
- IV. Use the Up/Down buttons to select Call
- V. Press ENTER to start the dialing sequence.

Other Operations

- FLASH Button
 - During conversation mode, additional network services such as "Call Waiting" can be accessed via the use of the FLASH button.
- REDIAL Button
 - Press the button and press the REDIAL Button if you wish to redial the last number dialed.
- Volume Control Button
- The handset earpiece volume can be adjusted using VOL + and VOL button.